



Hotwell Tanks and Deaerators

The temperature of the water being fed to the boiler is of paramount importance.

Condensate contains approximately 25% of the energy of steam; so recovering as much condensate as possible is key to maximising operational efficiency.

Hotwell tanks and deaerators are used to store recovered condensate whilst mixing it with fresh make-up water, helping to drive off dissolved oxygen, reducing the need for chemical oxygen scavengers and improving system efficiency.

All hotwell tanks are manufactured from stainless steel, insulated with high-density mineral wool to minimise heat losses, and externally clad with self-coloured Aluzinc.

Steam injection systems are highly recommended to ensure feed water is stored at the correct temperature. Semi or full deaerator heads are available on request.




Byworth Spares Department

Tel: +44 (0)1535 665225

Email: spares@byworth.co.uk



Hotwell Tanks and Deaerators

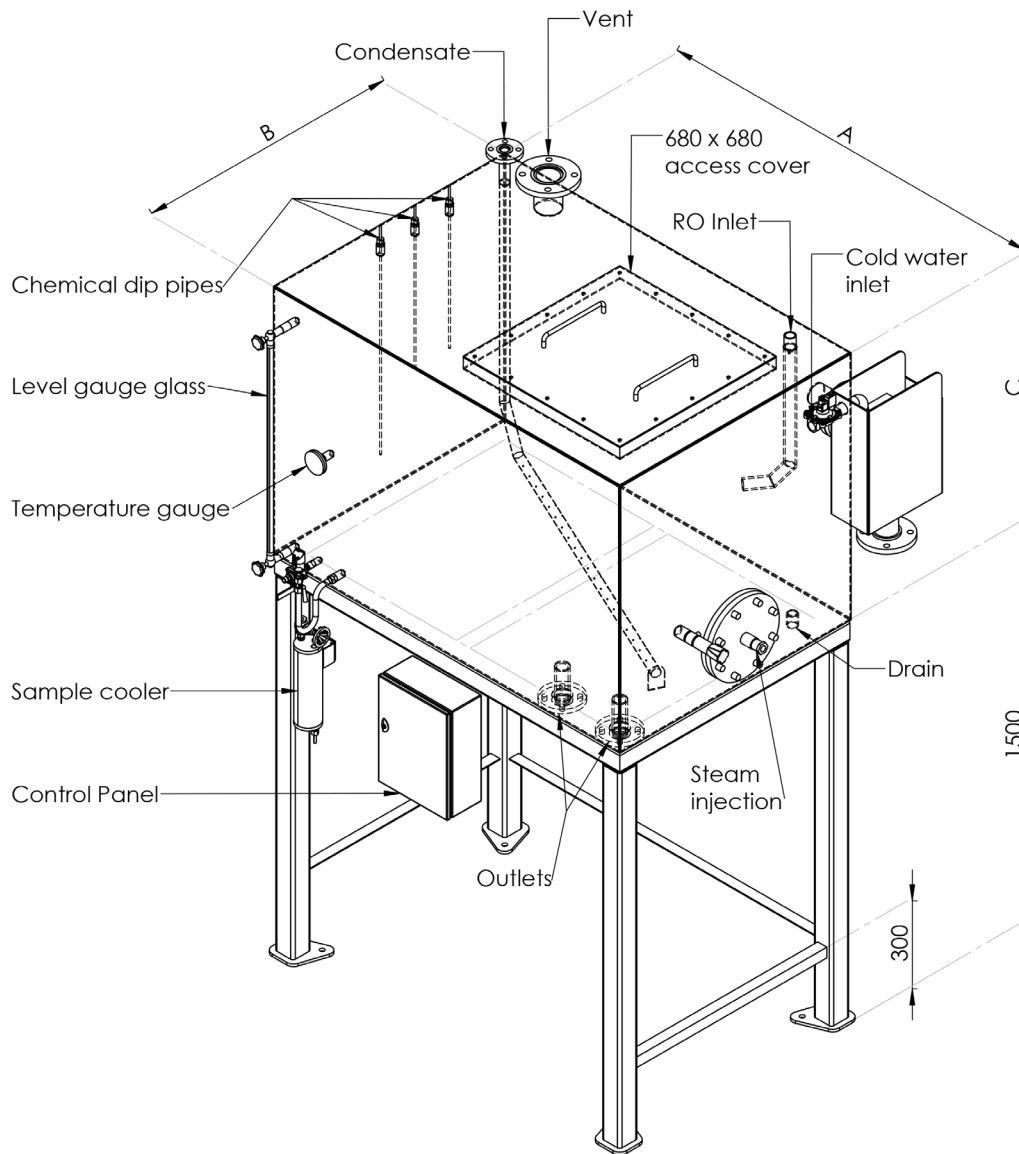

Capacity (ltrs)	0.56m ³	0.75m ³	1m ³	1.5m ³	2m ³	2.5m ³	3m ³	3.75m ³	4.5m ³	6.75m ³	7.5m ³	8m ³	9m ³	12m ³
A	1m	1m	1m	1.5m	2m	2.5m	2m	2.5m	3m	3m	3m	4m	4m	4m
B	0.75m	0.75m	1m	1m	1m	1m	1m	1m	1m	1.5m	2.5m	2m	1.5m	2m
C	0.75m	1m	1m	1m	1m	1m	1.5m	1.5m	1.5m	1.5m	1m	1m	1.5m	1.5m
Outlets	DN32	DN32	DN32	DN40	DN40	DN40	DN50	DN50	DN50	DN50	DN65	DN65	DN65	DN80
Overflow	DN65	DN65	DN65	DN65	DN65	DN65	DN65	DN100	DN100	DN100	DN100	DN100	DN100	DN100
Vent	DN50	DN50	DN50	DN80	DN80	DN80	DN100	DN100	DN100	DN100	DN100	DN100	DN100	DN100
Drain	1"	1"	1"	1"	1"	1"	1½"	1½"	1½"	1½"	1½"	2"	2"	2"
Inlets	1"	1"	1"	1"	1"	1"	1"	1½"	1½"	1½"	1½"	1½"	2"	2"
Condensate*	DN20	DN20	DN20	DN25	DN25	DN32	DN32	DN32	DN40	DN40	DN50	DN50	DN50	DN50

*Condensate subject to change (data based on 80% return).

For illustration purposes only. Design drawing available upon request

For further details contact our Spares Department on
 +44 (0)1535 665225 / spares@byworth.co.uk